

DEVELOPING INDEPENDENT TECH, SERVING HYDROGEN SOCIETY



Corporate Website



WeCom

Ningbo Zhongke Cotrun New Energy Science Technology Co., Ltd.

AD 3F, No.20, Kandun West Street, Cixi, ZheJiang 315303, China

E zkkcenergy@cas-nano.cn

W www.cas-nano.cn

T 0086-574-63081905

YHKC

Ningbo Zhongke Cotrun New Energy Science Technology Co., Ltd.

- Nano-catalyst Expert
- MEAs Expert
- Small PEM Electrolyzer Expert



DEVELOPING INDEPENDENT TECH, SERVING HYDROGEN SOCIETY



YHKC

Ningbo Zhongke Cotrun New Energy Science Technology Co., Ltd.

Ningbo Zhongke Cotrun New Energy Science Technology Co., Ltd. is a national high-tech enterprise and a specialized-sophisticated enterprise in Ningbo, with the core technology and team originated from Shanghai Advanced Research Institute, Chinese Academy of Sciences. The company specializes in the research and development of nanostructured electrocatalysts, membrane electrode assemblies (MEAs) for PEM fuel cells and water electrolyzers, focusing on the industrialization, application, and the solution for the customers. The company has over 20 invention patents, and participated in numerous national-level research programs.

The company has meticulously developed supported and unsupported electrocatalysts, MEAs for PEM fuel cell & water electrolysis, and electrolyzer products. These products demonstrate outstanding performance and have been widely utilized in various fields including fuel cells, PEM electrolysis, gas sensors, metal-air batteries, biotechnology and pharmaceutical chemistry. The key technical parameters have reached the international advanced levels. The company has won the First Prize of Technology Invention from the Chinese Renewable Energy Society, the China International Industry Fair New Innovation Award, and other honors.

"Developing Independent Tech., Servicing Hydrogen Energy Society" is the company's consistent business philosophy. Against the backdrop of the "dual-carbon" strategy, the company aims to break through the bottlenecks for key materials and realizes the large-scale application of the core components in hydrogen energy industry chain. The company will continue to carry forward the pioneering spirit, and is committed to providing our customers with "professional, high-quality, reliable, and cost-effective" one-stop application solutions with profound professional knowledge and rich practical experience, contributing to the development of the industry.



10 / years /

10 - year industry experience

3500 / m² /

3,500 - square - meter intelligent production base

32 / P /

Distributed in 32 provincial - level administrative regions across the country

28 / H /

28-item High - tech products



CORPORATE HONORS



Innovation Award of China International Industry Fair



First Prize in S&T Award of China Renewable Energy Society



- High-tech certified enterprise; Specialized and sophisticated new enterprise
- ISO-9001 quality management system certification
- IATF : 16949 automotive quality management system certification
- The product won the Innovation Award at the China International Industry Fair
- China Hydrogen Energy Industry New Development Special Contribution Award



INVENTION PATENT



Over 20 invention patents with independent intellectual property rights





Excellent Uniformity & Consistency

The nanostructured electrocatalysts present the features with high activity and durability to ensure the high quality of bulk-supplied products, meeting the customers’ expectations and laying a solid foundation for product quality and mass production.



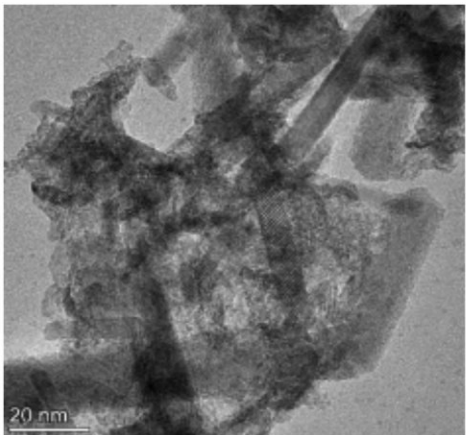
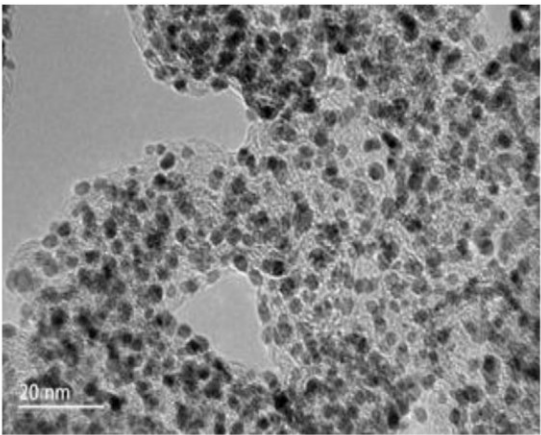


Technical Features and Advancement

Break through the key challenges for the composition and structure consistencies for kg-scale batch production. The metal loadings and particle sizes can be precisely controlled.

Catalysts	Specifications	Compositions	Average Particle Size (nm)	Electrochemical Active Area (ECSA, m²/g)	Mass Activity (MA, mA/mg)	Specific Surface Area (m²/g)
Pt/C	HiCaP40	40wt.%Pt, 60wt.%C	2.8	95	130	140
	HiCaP50	50wt.%Pt, 50wt.%C	3.3	85	130	110
	HiCaP60	60wt.%Pt, 40wt.%C	3.3	90	135	296
	HiCaP70	70wt.%Pt, 30wt.%C	3.3	55	134	85
PtCo	HiCaPC55	51wt.%Pt, 3wt.%Co, 45wt.%Ct	5.2	65	350	110
Pt Black	HiCaP100	>95 wt.%Pt	5.0	≥32	80	35
Ir-Black	HiCaI100	>95 wt.%Ir	4.5	120	180	52
IrO2	HiCaIO100	~80 wt.%Ir	7.0	30	240	120
Low-Ir Catalyst	HiCaIO70	~56 wt.%Ir	4.5	60	180	75
Ir/C	HiCaI20	20wt.%Ir, 80wt.%C	2.5	180	600	500
	HiCaI85	85wt.%Ir, 15wt.%C	4.5	85	190	145
PtRu Black	HiCaPR100	65wt.%Pt, 35wt.%Ru	3.2	30	190	40
PtRu/C	HiCaPR60	40wt.%Pt, 20wt.%Ru, 40wt.%C	4.0	85	/	100
Ru-Black	HiCaR100	>95wt.%Ru	7.0	40	200	80

- Break through the key technologies for consistent of composition and structure in kilogram-scale batch production.
- The loading amount and particle size can be precisely controlled.

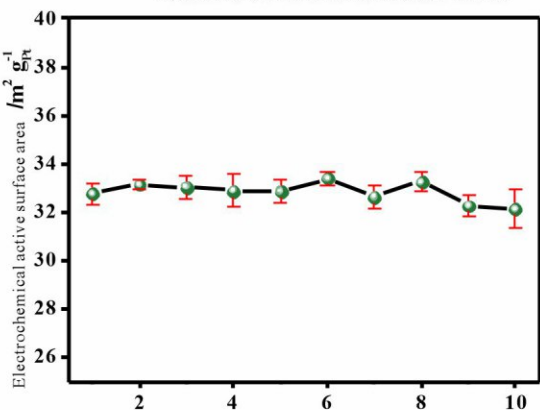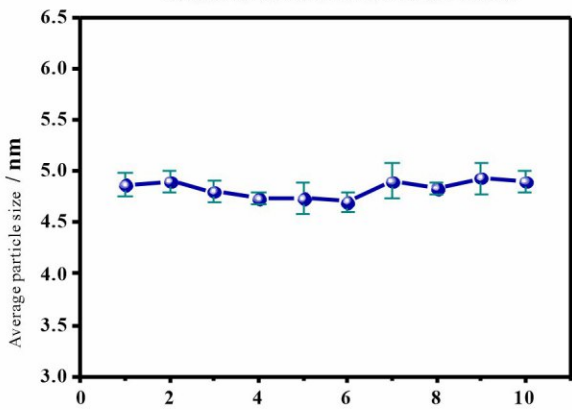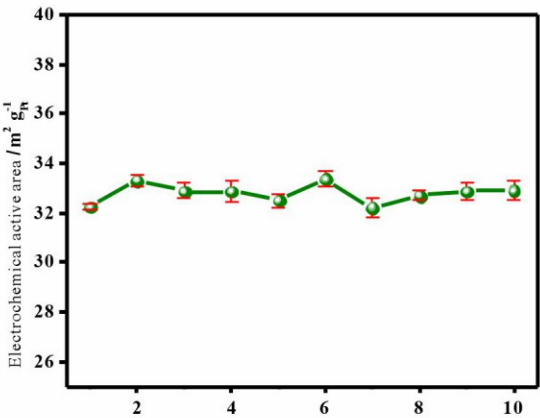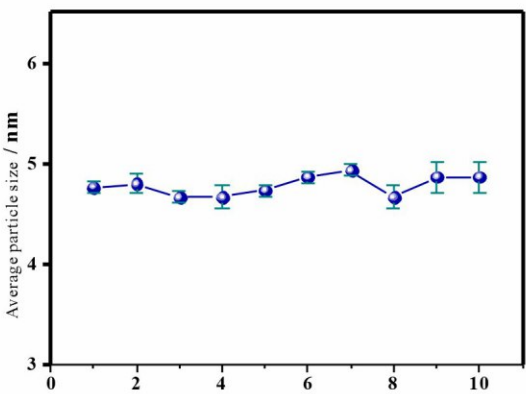

Platinum Supported on Carbon





Technical Features and Advancement

Kilogram-scale preparation for each batch.
Platinum loading supported on carbon is adjustable ranging from 1~70%.
Platinum nanoparticles feature with high uniformity with the standard difference of ± 0.2 nm.
The unique lattice compressive stress enhances the activity and stability.

Application Scenarios
PEM fuel cells
PEM water electrolyzer



Platinum-Carbon Catalyst

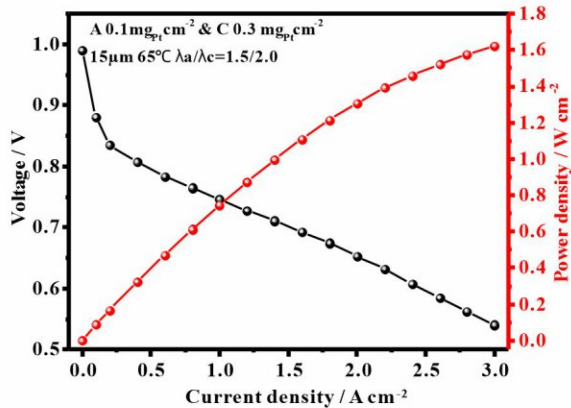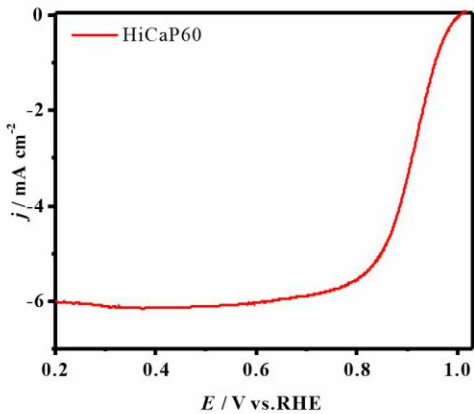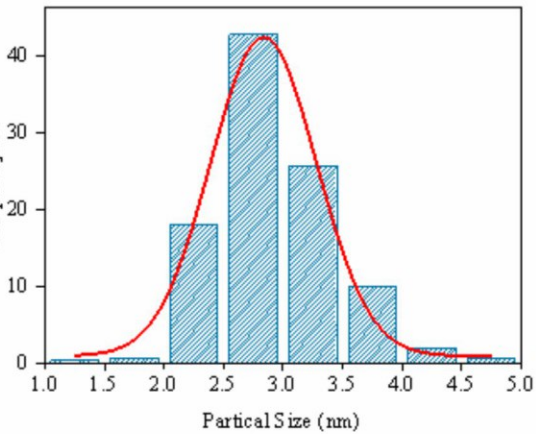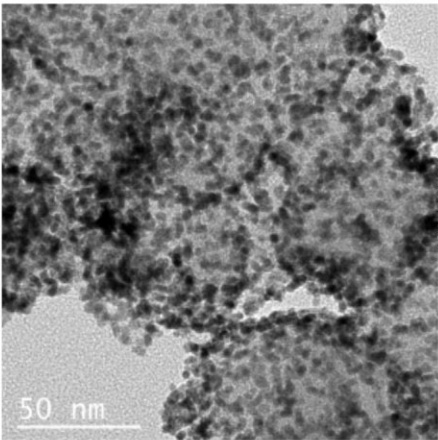

		Initial	30Kcycles
HiCaP40	ECSA/m ² mg _{Pt} ⁻¹	95	72
	MA/ mAmg _{Pt} ⁻¹	130	108
	Voltage /0.8 A cm ⁻²	0.712	0.687
HiCaP50	ECSA/m ² mg _{Pt} ⁻¹	90	63
	MA/ mAmg _{Pt} ⁻¹	130	109
	Voltage /0.8 A cm ⁻²	0.744	0.719
HiCaP60	ECSA/m ² mg _{Pt} ⁻¹	85	64
	MA/ mAmg _{Pt} ⁻¹	135	106
	Voltage /0.8 A cm ⁻²	0.765	0.744
HiCaP70	ECSA/m ² mg _{Pt} ⁻¹	55	42
	MA/ mAmg _{Pt} ⁻¹	134	114
	Voltage /0.8 A cm ⁻²	0.762	0.741

Referring to US DOE square-wave test standard

Platinum-Black Catalyst

Technical Features and Advancement

Kilogram-scale preparation for each batch
Particle size is uniform and adjustable from 4~10 nm.
Increased bulk density.
High ink dispersibility.

Application Scenarios

- H2-O2 fuel cells
- Cathode for PEM hydrogen generators
- Electrochemical sensors



Platinum-Black Catalyst



Platinum-Ruthenium Alloy Black




PtRu Alloy Supported on Carbon

Technical Features and Advancement


Kilogram-scale preparation for each batch
High alloying degree, close to the theoretical value.
Uniform size of PtRu nanoparticles, with the standard difference of ± 0.3 nm.

Application Scenarios





- DMFC (Direct Methanol Fuel Cell)
- Anodic CO-tolerant catalyst for PEMFC (Proton Exchange Membrane Fuel Cell)
- Cathode catalyst for AEMWE (Alkaline Anion Exchange Membrane Water Electrolyzer)
- Anode catalyst for AEMFC (Alkaline Anion Exchange Membrane Fuel Cell)

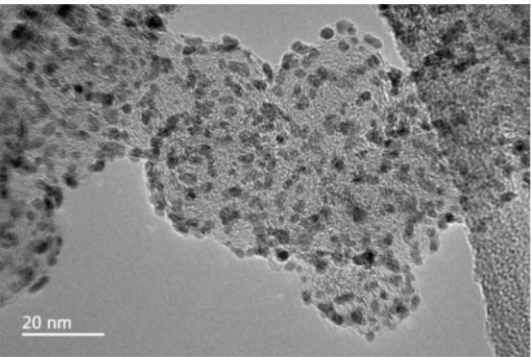

HiCaPR60

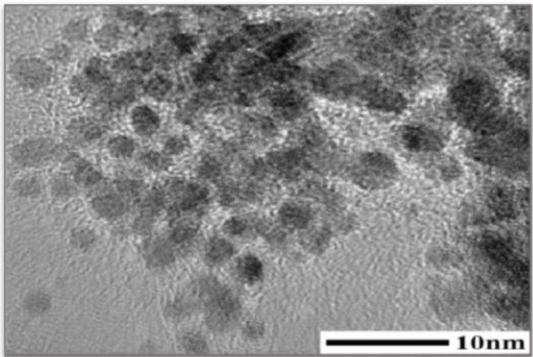

HiCaPR100

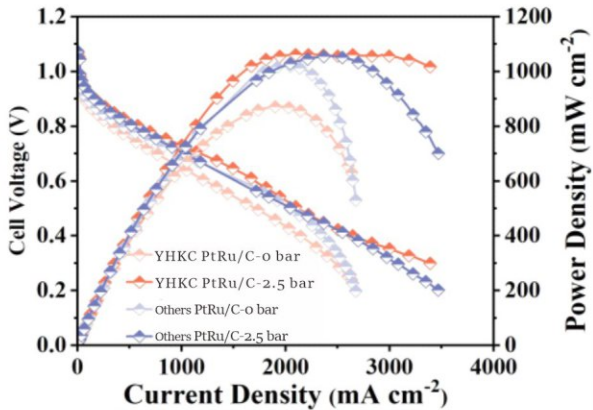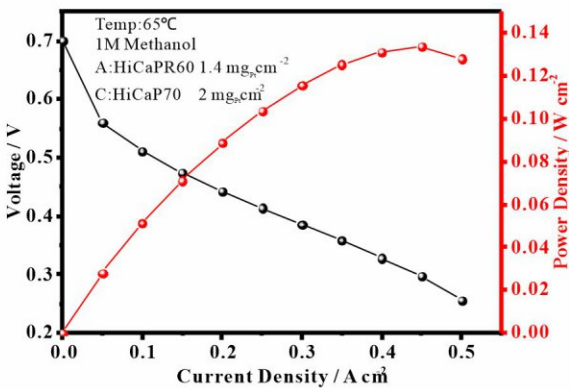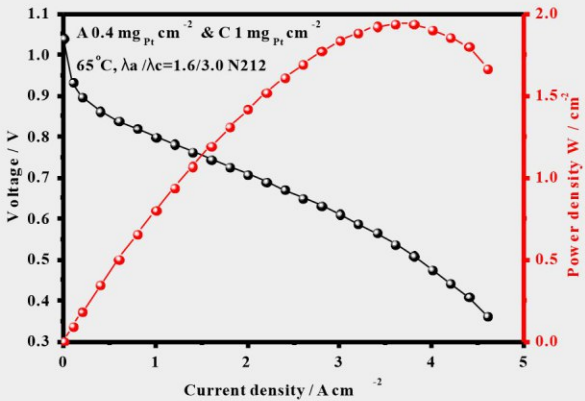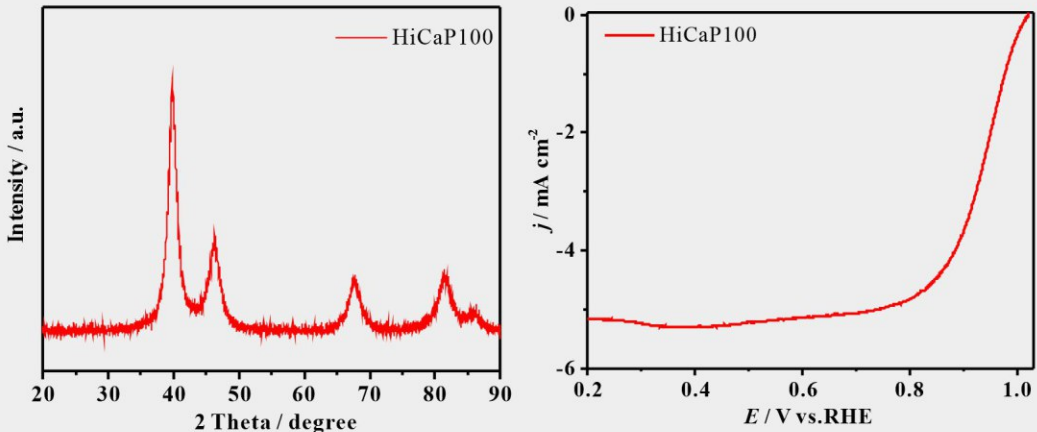

Unsupported Iridium Oxide

Technical Features and Advancement




Kilogram-scale preparation for each batch
Surface hydroxylation treatment, issuing high dispersibility.
High specific surface area (> 100 m²/g).
Composite structure ensuring both high activity and stability

Application Scenarios







Anode Catalysts for PEM Water Electrolysis
Fuel Cell Reversal Tolerance



Unsupported Iridium Oxide

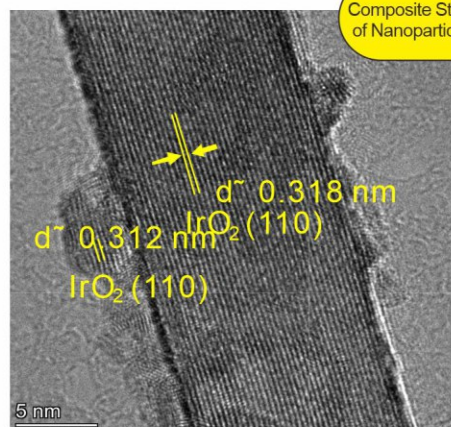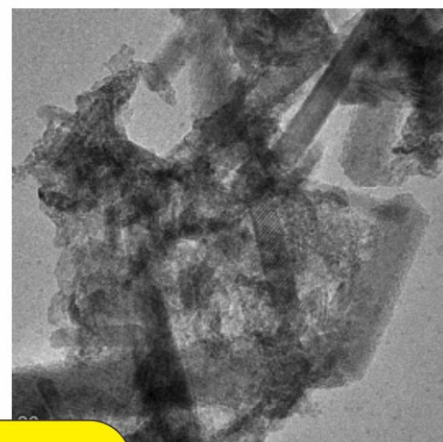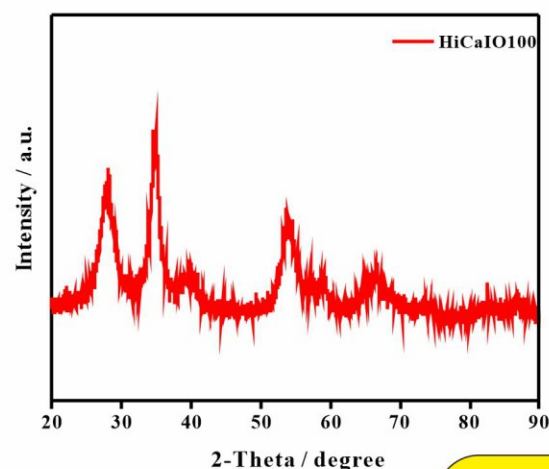

Composite Structure Composed of Nanoparticles and Nanorods

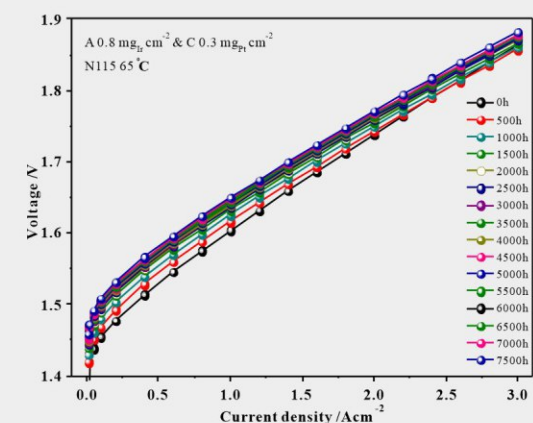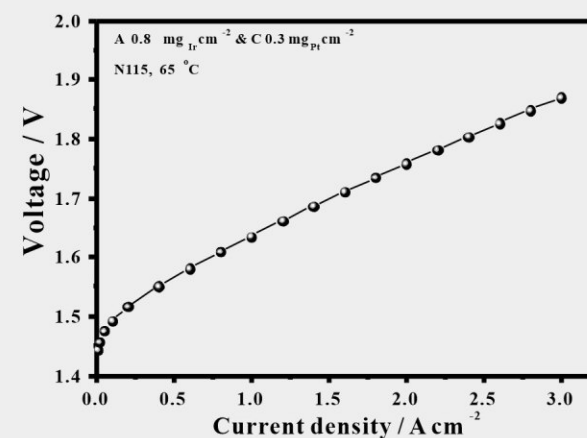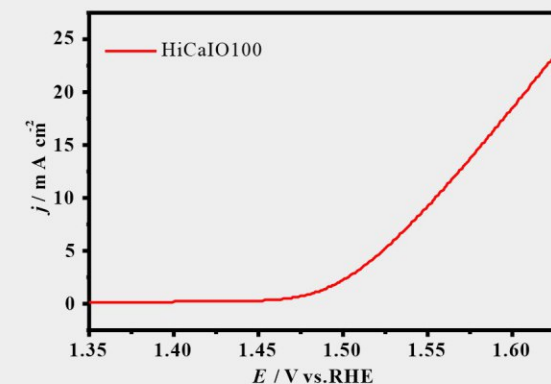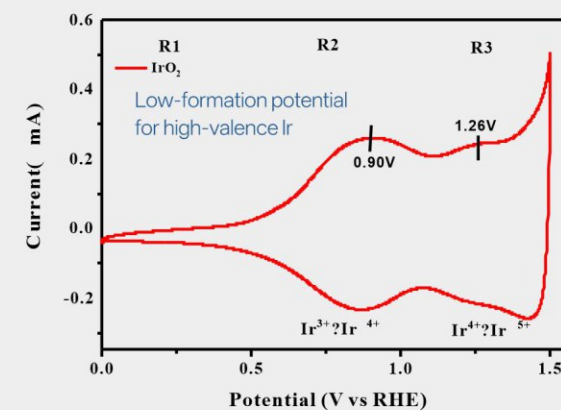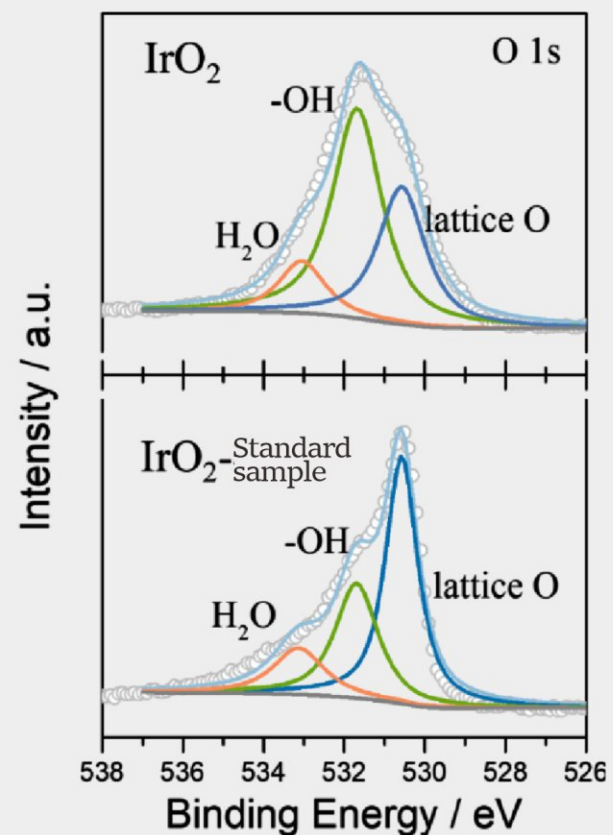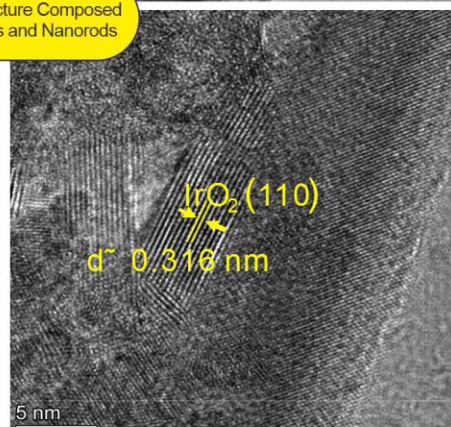

Unsupported Iridium Black

Technical Features and Advancement


500-gram-scale preparation for each batch
Oxygen evolution overpotential < 310 mV @ 10 mA cm⁻² in 0.1 M HClO₄.
Excellent stability with no decay over 3000 h testing.

Application Scenarios

PEM Water Electrolysis
Fuel Cell Reversal Tolerance



Unsupported Iridium Black

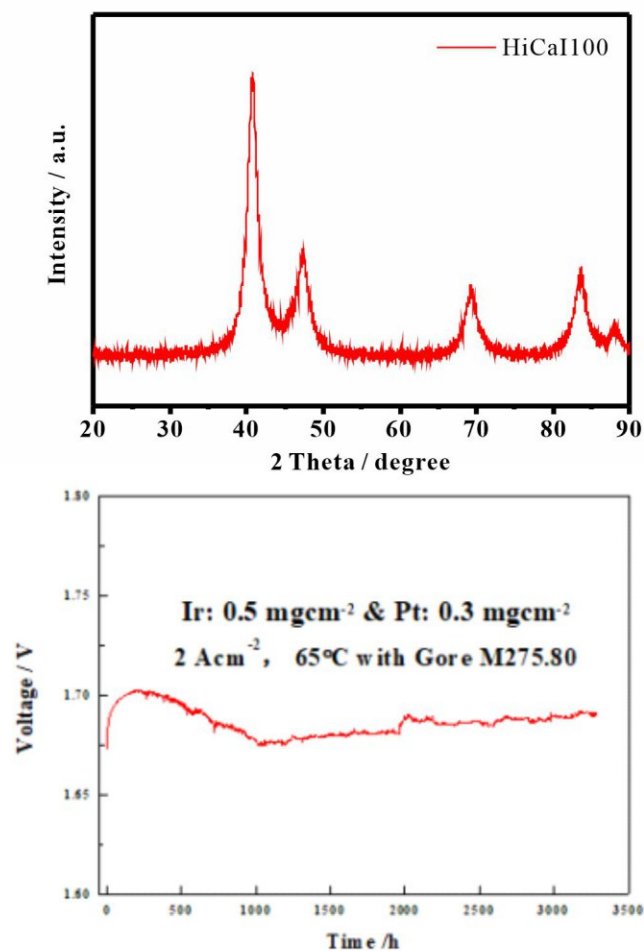

Low-Iridium Catalyst

Technical Features and Advancement


500-gram-scale preparation for each batch
Oxygen evolution overpotential < 320 mV @ 10 mA cm⁻² in 0.1 M HClO₄.
High stability with no decay over 3000 h testing

Application Scenarios

Hydrogen Production for Civil Use



Low-Iridium Catalyst

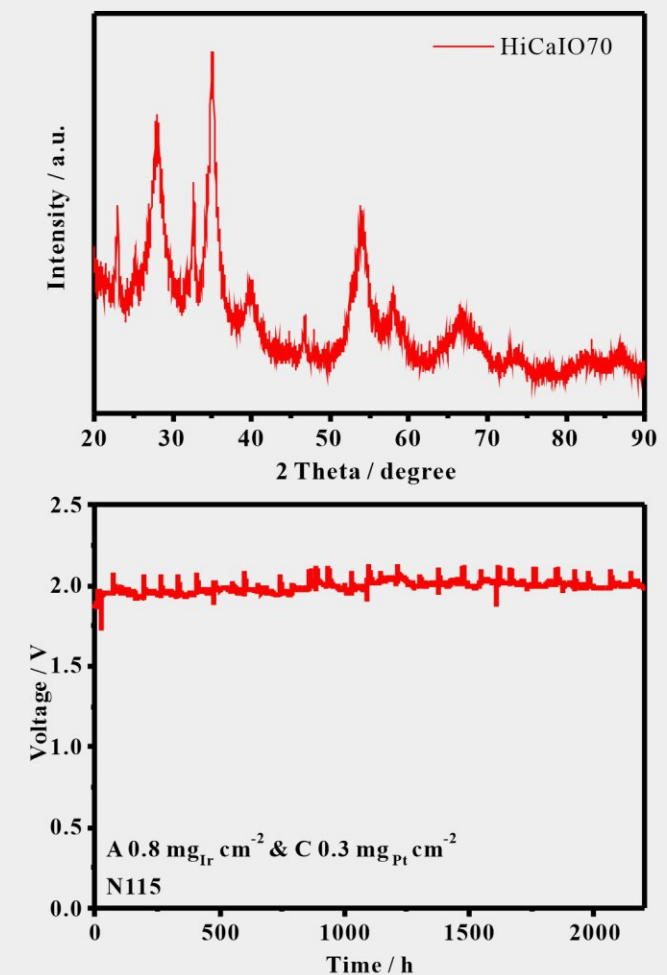

Platinum-Alumina Catalyst

Technical Features and Advancement

Highly dispersed Pt/ Al₂O₃ catalyst

This catalyst is a noble metal-based catalyst supported on activated alumina, primarily employed for hydrogenation reactions of aromatic aldehydes, aniline derivatives, and nitro-aromatic-aliphatic compounds. It also serves for catalytic deoxygenation in hydrogen gas or hydrogen-containing gas mixtures and widely utilized for hydrogen removal from oxygen gas and oxygen-containing gas mixtures.



Platinum-Alumina Catalyst

Metal Content	Color
0.5% Pt (Content is optional)	Dark grey
Carrier	Carrier Size
γ-Al ₂ O ₃	Φ3 ~ 5 mm (Optional)
Carrier Specific Surface Area	Carrier Pore Volume
≥300 m ² /g	≥0.38 ml/g
Bulk Density	Compressive Strength
0.72 g/cm ²	≥90 N per pellet
Operating Temperature	Operating Pressure
Room temperature~300℃	Atmospheric pressure ~15 Mpa
Residual Oxygen after Purification	Service Life
≤1 ppm (Maximum up to 0.1 ppm)	≥3 years

Application Scenarios

Removal oO₂、O₃、NO_x、C₂H₂ and other hydrocarbon mixture

Palladium deoxidation catalyst

Technical Features and Advancement

Highly dispersed Pd deoxidation catalyst

The catalyst is noble metal-based catalyst supported on activated alumina, primarily employed for catalytic deoxygenation in hydrogen-containing gas mixtures, also widely utilized for hydrogenation-deoxygenation in nitrogen and other inert gases.

Principle:

The oxygen impurities in the gas react with hydrogen to form water when the feed gas passes through the catalyst, there by achieving deoxygenation.



Palladium deoxidation catalyst

Metal Content	Color
0.5% Pd(Content is optional)	grey
Carrier	Carrier Size
γ-Al ₂ O ₃	Φ1.6 ~2.5 mm (Size is optional)
Carrier Specific Surface Area	Carrier Pore Volume
≥300 m ² /g	≥0.38 ml/g
Bulk Density	Compressive Strength
0.72 g/cm ²	≥90 N per pellet
Operating Temperature	Operating Pressure
Room temperature~650℃	Atmospheric pressure ~30 Mpa
Residual Oxygen after Purification	Service Life
≤1 ppm (Maximum up to 0.1 ppm)	≥3 years

Application Scenarios

Removal oO₂、O₃、NO_x、C₂H₂ and other hydrocarbon mixture

Other nano-precious metal catalysts



Iridium-Carbon



Ruthenium Oxide



Ruthenium Black



Platinum-Nickel



Platinum-Cobalt




Palladium-Carbon



Iridium-Ruthenium Black

Membrane Electrode Assemblies for PEM Water Electrolysis

Professional Custom-made Available upon the Request




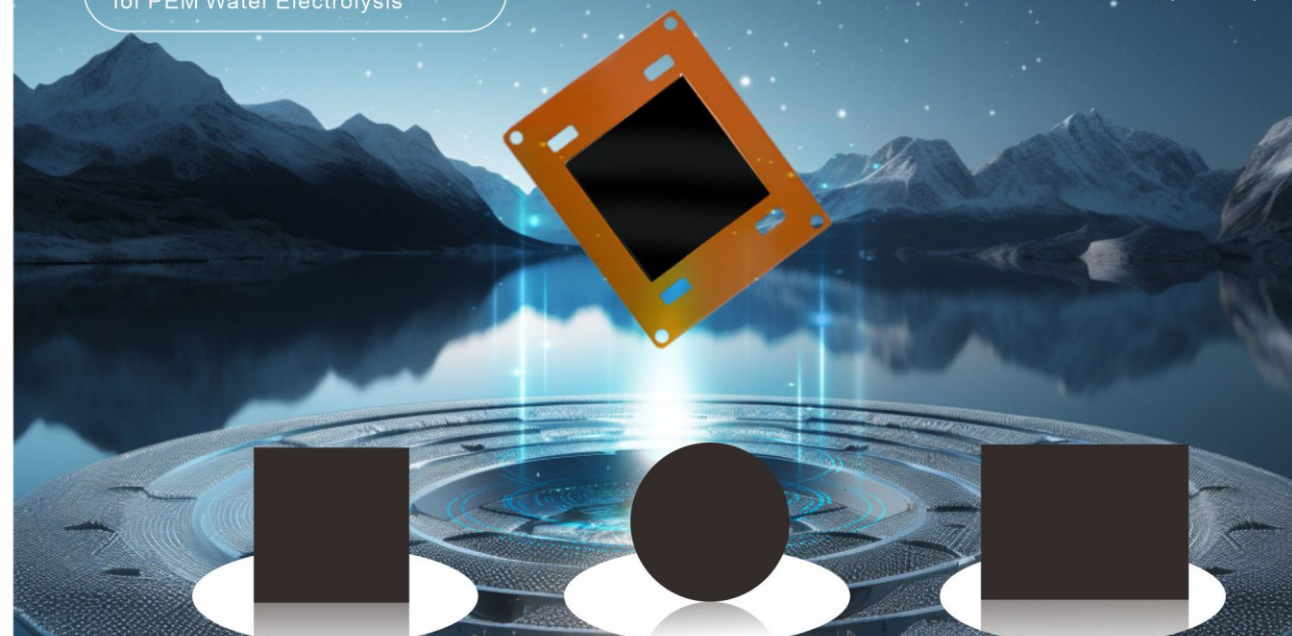


Product Features

Annual production exceeds 10,000 m². The maximum effective area of the MEAs is over 3600 cm², and the maximum edge-sealing size is 100x100 cm².

The precious metal usage within the MEAs can be as low as 0.8 mg/cm².

The MEAs feature high activity, stability, consistency and low precious metal loading and have been utilized in MW-level stack

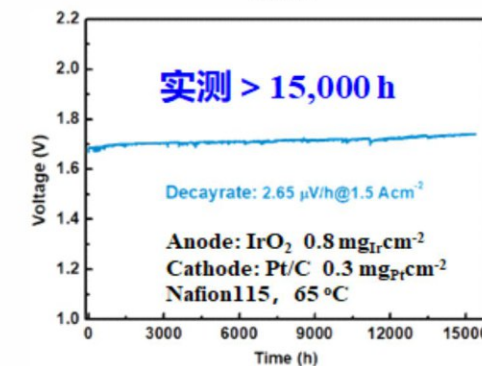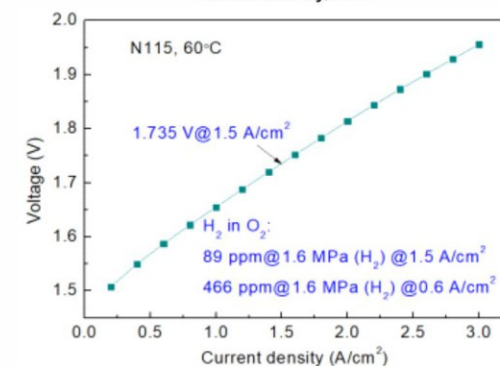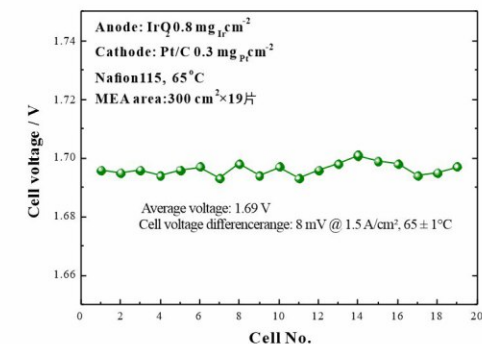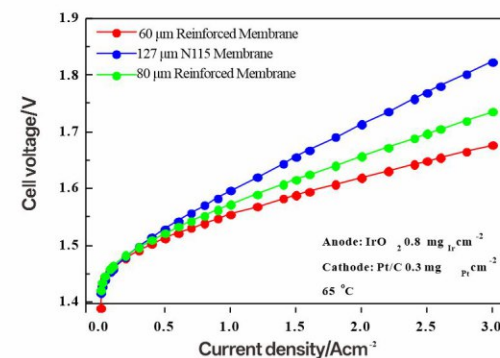

Standard test fixture




- Unique platinum-plated flow field and high-purity titanium diffusion layer;
- High-precision positioning and easy to maintain tight sealing;
- The test results are highly accurate and have good stability.



- Dedicated high-performance and long-durability membrane electrode;
- Easy to learn, practical, and with good comparability;
- Support customization of effective area and component characteristics.

PEM Electrolyzer

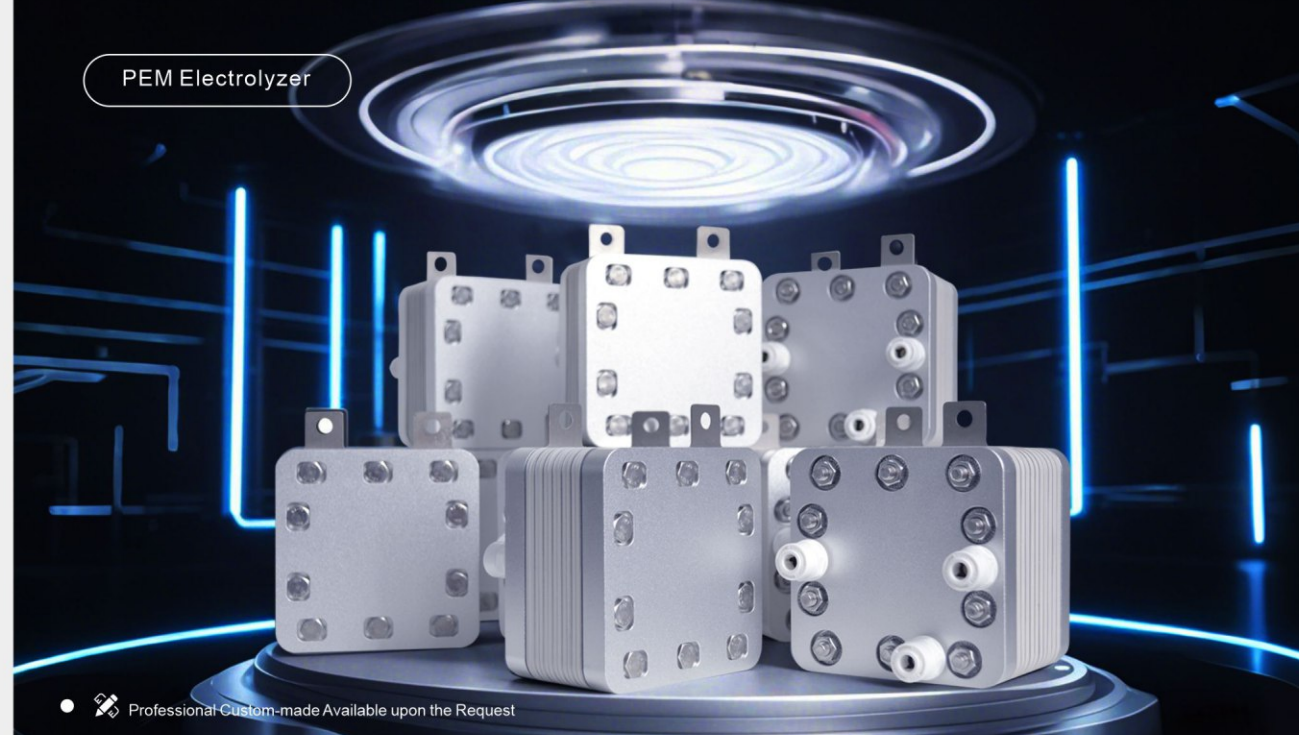

Professional Custom-made Available upon the Request



Long lifetime



High electrolysis efficiency

99.999%


High hydrogen purity (99.999%)



High performance



High safety

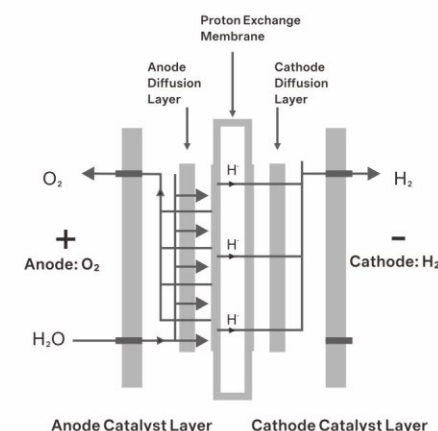


Independently master the core technologies for PEM water electrolysis

PEM water-electrolysis technology can accommodate the intermittency of renewable energy sources such as photovoltaic and wind energy. It is a premier technology for coupling with renewable energy to produce green hydrogen and one of the crucial technologies for advancing clean energy landscape.

Compared with traditional alkaline water electrolysis and other technologies, PEM water-electrolysis features high efficiency, high-purity hydrogen, rapid start-up, and strong fluctuating adaptability (well-suited to couple renewable energy). Moreover, the compact structural design significantly saves the space and is highly adaptable for scenarios with limited space.

CASI New Energy Technology (Ningbo) Co., Ltd. meticulously selects the raw materials, fine-optimizes production processes, and rigorously controls every step of the workflow, striving for perfection at every juncture. Through continuous efforts, the company aims to become a global leading supplier of nanostructured electrocatalysts and PEM based MEAs, contributing to the development of the green hydrogen industry and facilitating the global energy structure's transition towards cleanliness and sustainability.

PEM Water Electrolyzer: 1 Nm³/H



● Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model

KA1

Hydrogen Production Rate 1m³/H

Oxygen Production Rate 0.5m³/H

Constant Current (A) 120

Circulating Water Temperature (°C) 25-70

Circulating Water Flow 160L/H

Circulation Mode 水泵循环

Hydrogen Purity (%) 99.99

Water Electrolysis Method MEA

Maximum Pressure Resistance 1.6Mpa

TDS	Anode Water	≤1
	Cathode Water	/

Single - cell Voltage (v) 1.75-2.5

Dimensions (excluding Lugs) 190*180*190

Effective Area of MEA 125.5*80.5(20)

Application Fields Fuel cell system testing, Fuel cell backup power supply, Combined heat and power, Semiconductor, Multi-energy complementary independent micro - grids, etc.

PEM Water Electrolyzer: 0.6Nm³/H



● Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model

KA0.60

Hydrogen Production Rate 0.6m³/H

Oxygen Production Rate 0.3m³/H

Constant Current (A) 120

Circulating Water Temperature (°C) 25-70

Circulating Water Flow 100L/H

Circulation Mode 水泵循环

Hydrogen Purity (%) 99.99

Water Electrolysis Method MEA

Maximum Pressure Resistance 1.6Mpa

TDS	Anode Water	≤1
	Cathode Water	/

Single - cell Voltage (v) 1.75-2.5

Dimensions (excluding Lugs) 190*180*145

Effective Area of MEA 125.5*80.5(12)

Application Fields Fuel cell system testing, Fuel cell backup power supply, Combined heat and power, Semiconductor, Multi-energy complementary independent micro - grids, etc.

PEM Water Electrolyzer: 6000 Nml/Min



• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model	KB6000
Hydrogen Production Rate	6000Nml/Min
Oxygen Production Rate	3000Nml/Min
Constant Current (A)	80
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	3000ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	1Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	176*126*97
Effective Area of MEA	106*78 (10)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 4800 Nml/Min



• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model	KB4800
Hydrogen Production Rate	4800Nml/Min
Oxygen Production Rate	2400Nml/Min
Constant Current (A)	80
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	2400ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	1Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	176*126*84
Effective Area of MEA	106*78(8)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 3600 Nml/Min



• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage




Safe and reliable,
Stable performance

Model	KB3600
Hydrogen Production Rate	3600Nml/Min
Oxygen Production Rate	1800Nml/Min
Constant Current (A)	80
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	2000ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	1Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	176*126*71
Effective Area of MEA	106*78 (6)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 2400 Nml/Min

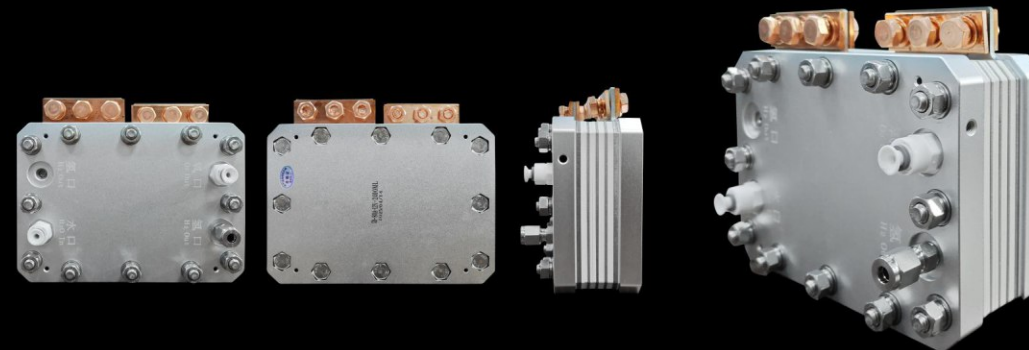

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage




Safe and reliable,
Stable performance

Model	KB2400
Hydrogen Production Rate	2400Nml/Min
Oxygen Production Rate	1200Nml/Min
Constant Current (A)	80
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	600ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	1Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	176*126*59
Effective Area of MEA	106*78(4)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 2000 Nml/Min

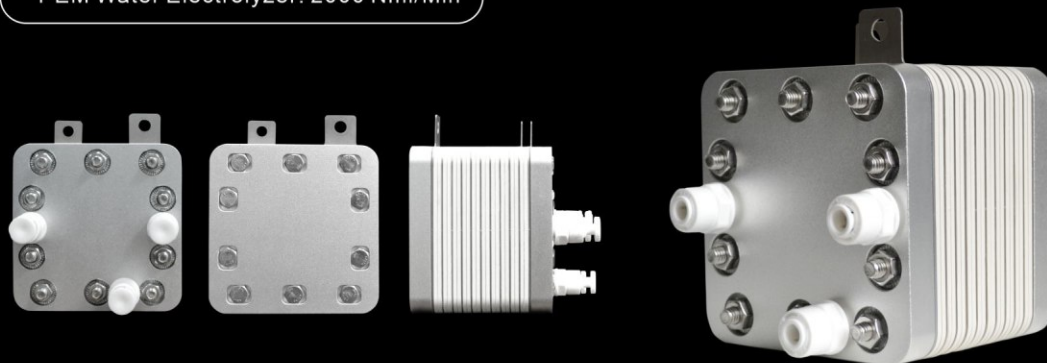

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage




Safe and reliable,
Stable performance

Model	KC2000
Hydrogen Production Rate	2000Nml/Min
Oxygen Production Rate	1000Nml/Min
Constant Current (A)	30
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	220ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	0.8Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	93*93*79
Effective Area of MEA	56*56 (10)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 1800 Nml/Min

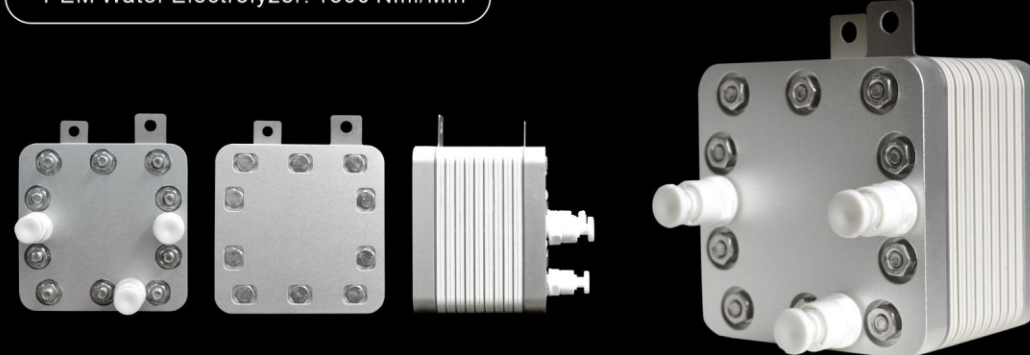

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage




Safe and reliable,
Stable performance

Model	KC1800
Hydrogen Production Rate	1800Nml/Min
Oxygen Production Rate	900Nml/Min
Constant Current (A)	30
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	200ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	0.8Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	93*93*73
Effective Area of MEA	56*56(9)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 1600 Nml/Min

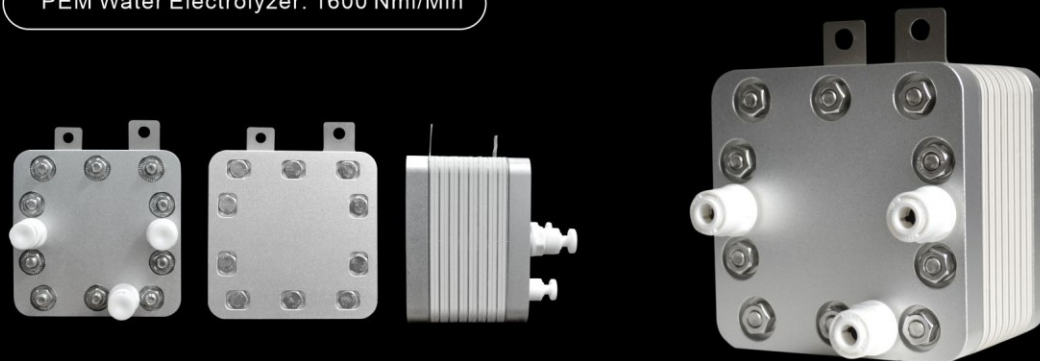

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage




Safe and reliable,
Stable performance

Model	KC1600
Hydrogen Production Rate	1600Nml/Min
Oxygen Production Rate	800Nml/Min
Constant Current (A)	30
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	180ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	0.8Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	93*93*67
Effective Area of MEA	56*56 (8)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 1400 Nml/Min

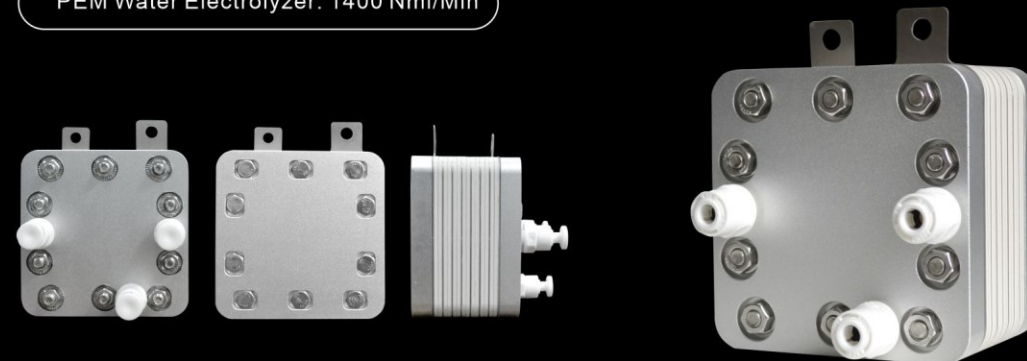

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage




Safe and reliable,
Stable performance

Model	KC1400
Hydrogen Production Rate	1400Nml/Min
Oxygen Production Rate	700Nml/Min
Constant Current (A)	30
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	160ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	0.8Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	93*93*61
Effective Area of MEA	56*56(7)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 1200 Nml/Min

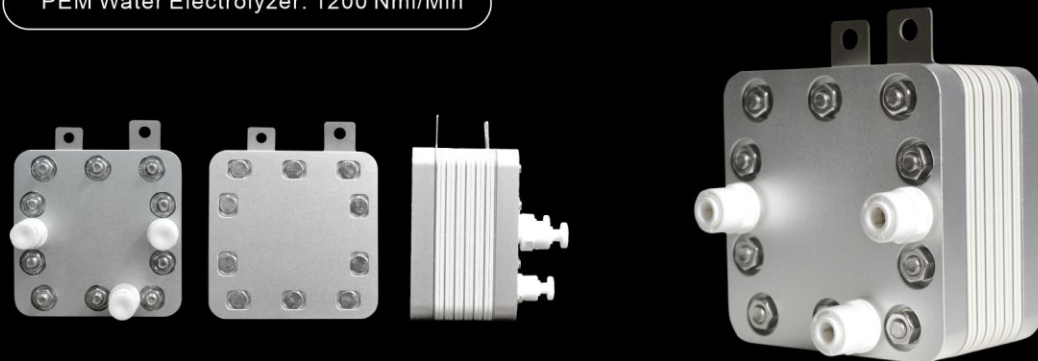

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model KC1200

Hydrogen Production Rate 1200Nml/Min

Oxygen Production Rate 600Nml/Min

Constant Current (A) 30

Circulating Water Temperature (°C) 25-45

Circulating Water Flow 140ml/Min

Circulation Mode Water Pump Circulation

Hydrogen Purity (%) 99.99

Water Electrolysis Method MEA

Maximum Pressure Resistance 0.8Mpa

TDS | Anode Water ≤1
Cathode Water /


Single - cell Voltage (v) 1.75-2.5

Dimensions (excluding Lugs) 93*93*55

Effective Area of MEA 56*56 (6)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 1000 Nml/Min

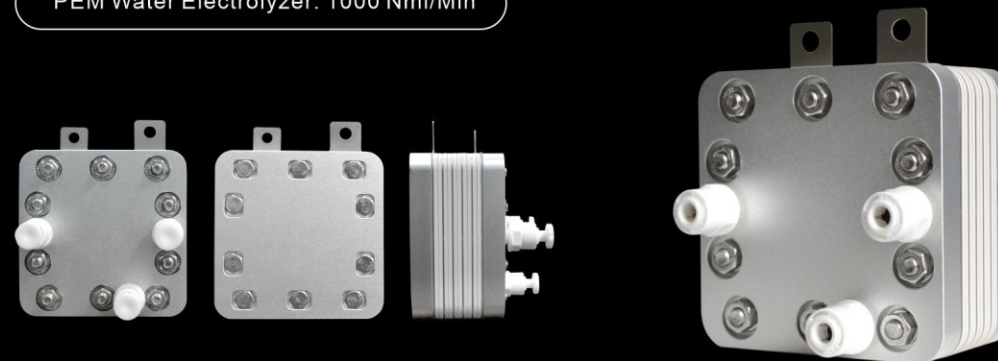

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model KC1000

Hydrogen Production Rate 1000Nml/Min

Oxygen Production Rate 500Nml/Min

Constant Current (A) 30

Circulating Water Temperature (°C) 25-45

Circulating Water Flow 140ml/Min

Circulation Mode Water Pump Circulation

Hydrogen Purity (%) 99.99

Water Electrolysis Method MEA

Maximum Pressure Resistance 0.8Mpa

TDS | Anode Water ≤1
Cathode Water /


Single - cell Voltage (v) 1.75-2.5

Dimensions (excluding Lugs) 93*93*49

Effective Area of MEA 56*56(5)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 800 Nml/Min

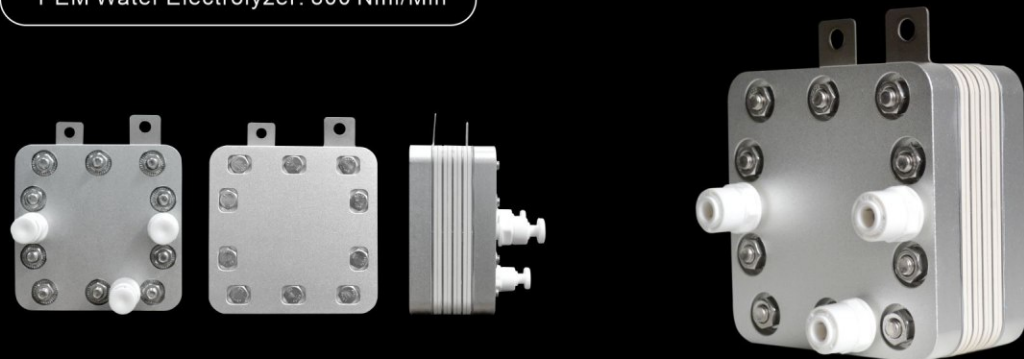

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model KC800

Hydrogen Production Rate 800Nml/Min

Oxygen Production Rate 400Nml/Min

Constant Current (A) 30

Circulating Water Temperature (°C) 25-45

Circulating Water Flow 120ml/Min

Circulation Mode Water Pump Circulation

Hydrogen Purity (%) 99.99

Water Electrolysis Method MEA

Maximum Pressure Resistance 0.8Mpa

TDS Anode Water ≤1
Cathode Water /


Single - cell Voltage (v) 1.75-2.5

Dimensions (excluding Lugs) 93*93*43

Effective Area of MEA 56*56 (4)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 600 Nml/Min

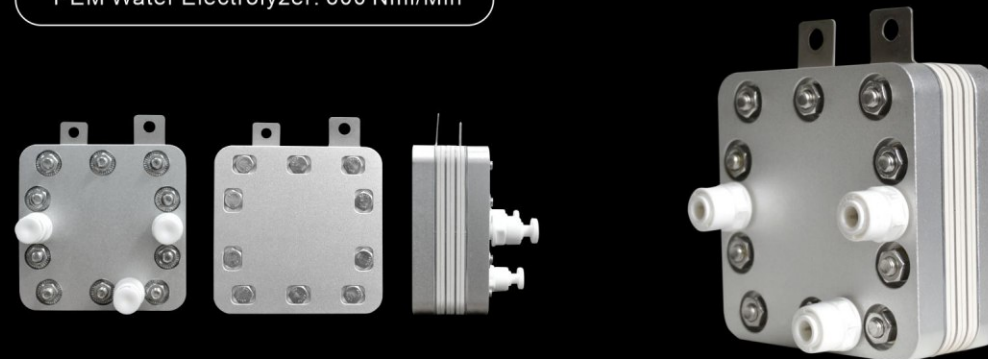

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model KC600

Hydrogen Production Rate 600Nml/Min

Oxygen Production Rate 300Nml/Min

Constant Current (A) 30

Circulating Water Temperature (°C) 25-45

Circulating Water Flow 100ml/Min

Circulation Mode Water Pump Circulation

Hydrogen Purity (%) 99.99

Water Electrolysis Method MEA

Maximum Pressure Resistance 0.8Mpa

TDS Anode Water ≤1
Cathode Water /


Single - cell Voltage (v) 1.75-2.5

Dimensions (excluding Lugs) 93*93*37

Effective Area of MEA 56*56(3)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 400 Nml/Min

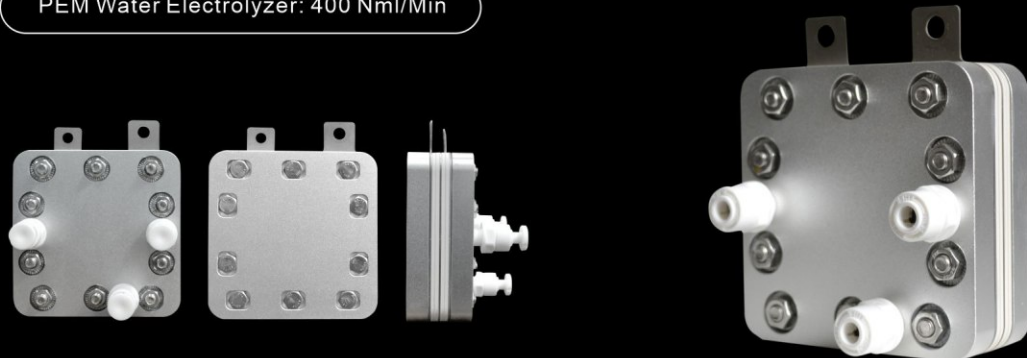

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model KC400

Hydrogen Production Rate 400Nml/Min

Oxygen Production Rate 200Nml/Min

Constant Current (A) 30

Circulating Water Temperature (°C) 25-45

Circulating Water Flow 80ml/Min

Circulation Mode Water Pump Circulation

Hydrogen Purity (%) 99.99

Water Electrolysis Method MEA

Maximum Pressure Resistance 0.8Mpa

TDS
Anode Water ≤1
Cathode Water /


Single - cell Voltage (v) 1.75-2.5

Dimensions (excluding Lugs) 93*93*31

Effective Area of MEA 56*56 (2)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 300 Nml/Min

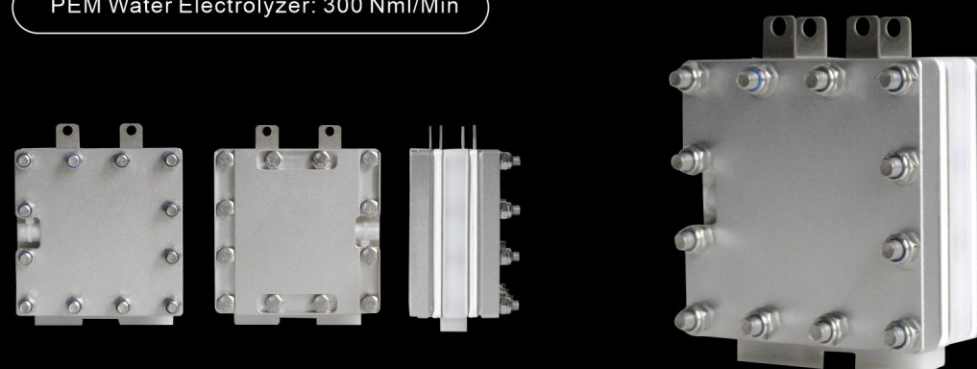

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model CA300

Hydrogen Production Rate 300Nml/Min

Oxygen Production Rate 150Nml/Min

Constant Current (A) 20

Circulating Water Temperature (°C) 25-45

Circulating Water Flow 60ml/Min

Circulation Mode Water Pump Circulation

Hydrogen Purity (%) 99.99

Water Electrolysis Method MEA

Maximum Pressure Resistance 0.8Mpa

TDS
Anode Water ≤1
Cathode Water /

Single - cell Voltage (v) 1.75-2.5

Dimensions (excluding Lugs) 74*74*39

Effective Area of MEA 53.5*53.5(2)

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 150 Nml/Min



• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage




Safe and reliable,
Stable performance

Model	CA150
Hydrogen Production Rate	150Nml/Min
Oxygen Production Rate	75Nml/Min
Constant Current (A)	20
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	50ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	0.8Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	74*74*23
Effective Area of MEA	53.5*53.5

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

PEM Water Electrolyzer: 50 Nml/Min

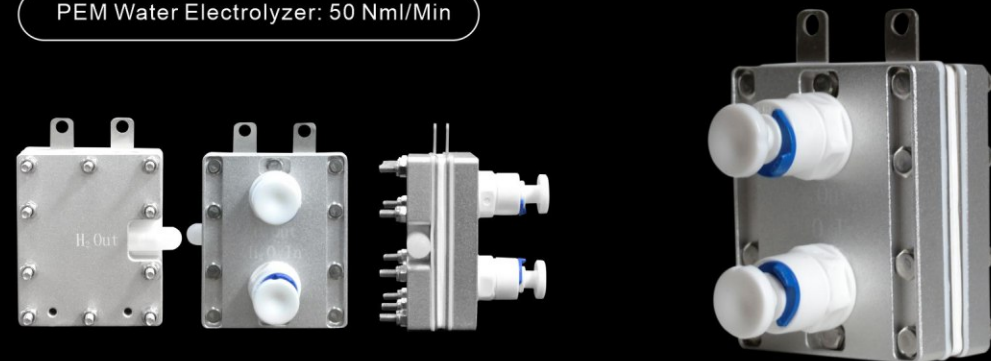

• Professional Custom-made Available upon the Request



Independent R & D and production:
Superior materials,
Exquisite processes



High purity hydrogen,
Long service life



High pressure resistance:
Capable of producing
high-pressure hydrogen



High current density,
Low power consumption,
stable voltage



Safe and reliable,
Stable performance

Model	CA050
Hydrogen Production Rate	50Nml/Min
Oxygen Production Rate	25Nml/Min
Constant Current (A)	12
Circulating Water Temperature (°C)	25-45
Circulating Water Flow	30ml/Min
Circulation Mode	Water Pump Circulation
Hydrogen Purity (%)	99.99
Water Electrolysis Method	MEA
Maximum Pressure Resistance	0.8Mpa
TDS	Anode Water ≤1
	Cathode Water /
Single - cell Voltage (v)	1.75-2.5
Dimensions (excluding Lugs)	58*48*23
Effective Area of MEA	43*33

Application Fields The fuel and carrier gas for gas chromatography (GC),
reaction gas for electrolytic conductivity detector (ELCD)
and atomic emission spectrometry detector (ED),
hydrogen-rich water generator; hydrogen-oxygen generator, etc.

Nano hydrogen-rich water generators

Superior Quality, Trustworthy Choice



Nano hydrogen-rich water generators



NNHW210-SV



NNHW210-BL



NNHW210-RG



NNHW210-BK



NNHW210-GS-SV



NNHW210-GS-BL



NNHW210-GS-RG



NNHW210-GS-BK



NNHW210-JC-WH



NNHW210-JC-GR



NNHW210-JC-BK

2500ppb

—
in 5 min

5000ppb

—
in 10 min



PRODUCT PARAMETER

Product Brand

YHKC

Product Name

Nano Hydrogen Water Generator

Product Model

NNHW210-xx /NNHW210-LH-xx/
NNHW210-GS-xx/NNHW210-JC-xx

Battery Capacity

1800mAh/3.7V

Single Electrolysis Time

5 minutes

Number of Electrolysis Cycles on a Full Charge

25 - 30 times

Single Hydrogen Production Amount

2500ppb

Hydrogen Production Amount for 2 - 3 Times

Above 5000ppb

Hydrogen Production Technology

PEM Hydrogen-Oxygen
Separation MEA

Proton Exchange Membrane

DuPont N117, USA

Product Dimensions

φ61*200mm

Capacity

210mL

Suitable Water Quality

Purified water / Mineral water /
Purified water


Material

Food - grade PC + Aluminum alloy

PORTABLE HYDROGEN INHALER

Convenient to carry and travel, use anytime, anywhere

Hydrogen Flow Oxygen Flow Total Weight
300ml/Min **150ml/Min** **2.4Kg**

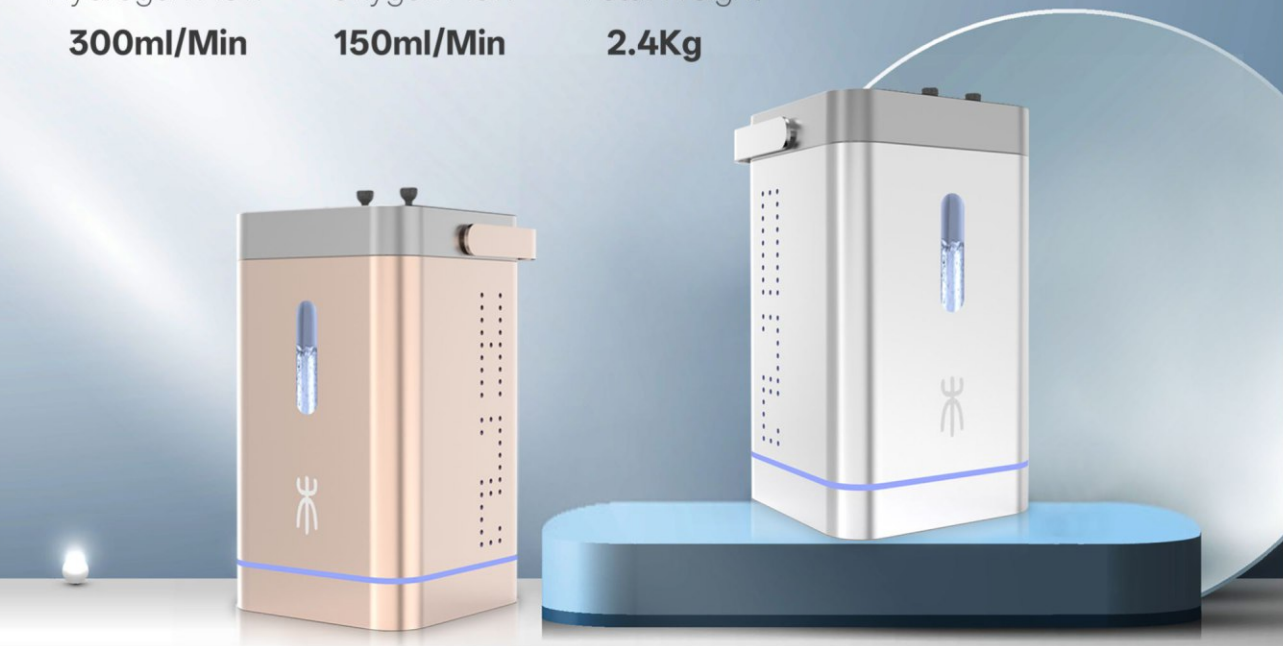

Portable Hydrogen Inhaler Series



STRONGER HEAT DISSIPATION

Stronger heat dissipation
with abundant holes



INDEPENDENT GAS OUTLETS

Independent hydrogen
and oxygen outlets



PORTABLE

Compact and portable design

PRODUCT PARAMETER

Product Brand	Product Name
YHKC	450mL Portable Hydrogen - Oxygen Generator
Product Model	Product Dimensions
HOR450-GD/HOR450-SV	11*11*19.3cm
Gross Weight	Hydrogen - Oxygen Mixed Inhalation
2.4kg	450 mL/min
Hydrogen Flow Rate	Oxygen Flow Rate
300mL/min	150 mL/min
Power Adapter	Power
AC110 ~ 240V/50 ~ 60HZ	90W
Adjustable Time	Hydrogen Purity
1H/2H/3H	99.99%
Hydrogen Production Principle	Suitable Water Temperature
Portable Hydrogen Water Sprayer Series	Room temperature
Suitable Water Quality	Warranty
Purified water	2years
Membrane Electrode	Color
DuPont N117 Membrane + Nano Platinum Coating, USA	Rose Gold / Space Silver

Hydrogen Water Sprayer Five Key Skin - caring Features



Deep penetration

The diameter of hydrogen-rich small-molecule water is 5 μm , less than that of human cells with 25 μm , therefore the hydrogen-rich small-molecule water can easily penetrate through the cell layer, effectively moisturizing.



Pure natural

Zero additives. Applicable even for children's delicate skin. Relieve your overused eyes as well.



Antioxidant

Hydrogen concentration up to 1000 ppb, highly effective antioxidant.



Mini version

Lipstick size, convenient in your bag or pocket.



Recycling utilization

One-time purchase for long-term use: 2-year quality guarantee.

Portable Hydrogen Water Sprayer Series



PRODUCT PARAMETER

Product Brand

YHKC

Product Name

Portable Hydrogen Water Nebulizer

Product Dimensions

φ30*136mm

Hydrogen Concentration

≥1000ppb

Battery Specification

3.7V/430mAh

Battery Type

Polymer Lithium - ion Battery

Power Adapter

≤5V Mobile Phone Charger

Charging Method

USB & Type - C Port Charging

Charging Time

Approximately 1.5h

Single Hydrogen Production Time

1 min

Number of Hydrogen Production Cycles on a Full Charge

Approximately 50 times

Water Tank Capacity

20ml

Suitable Water Quality

Mineral water / Tap water / Purified water

Material

German produced PC + ABS

Testing Reagent for Dissolved Hydrogen Concentration



PRODUCT PARAMETER

Product Brand

YHKC

Product Name

Dissolved Hydrogen Concentration Testing Reagent

Model

HWPDJ - 21

Hydrogen Concentration

1 drop \approx 100ppb, approximately 400 drops/bottle

YHKC

Ningbo Zhongke Cotrun New Energy Science Technology Co., Ltd.

New-energy enterprise focused on the development of high-performance precious metal based nanocatalysts with independent intellectual property rights.

NOBLE METAL-BASED NANOCATALYSTS

